
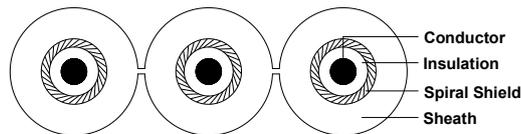


**C6220024111**  
**Audio Video Cable**

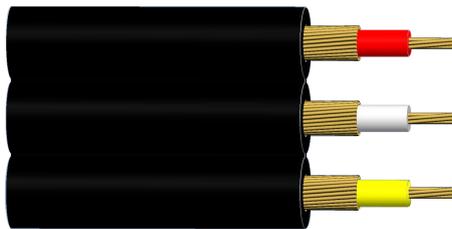

**DESCRIPTION**

27AWG., 0.12mmsq. Stranded PACW, 3 Cores, PVC Insulation, PACW Spiral Shield, PVC Sheath.

**APPLICATION**

Used for audio device connection.

**APPLICABLE STANDARD**

- EU RoHS Complies 2011/65/EU

**CONSTRUCTION**

**Conductor**

Material : Plain Annealed Copper Wire  
 Size : 27AWG (0.12mmsq.)  
 Construction : Stranded (10/0.12mm)

**Insulation**

Material : PVC  
 Nominal O.D : 0.96mm  
 Color : Red, White, Yellow

**Shielding**

Material : Plain Annealed Copper Wire, >90% Coverage



## C6220024111

### Audio Video Cable

#### Sheath

Material :	PVC
Nominal O.D :	2.7 x 8.1mm
Color :	Black

#### PHYSICAL PROPERTIES

Operating Temperature (Flexing)	-15°C to 60°C
Operating Temperature (Fixed)	-30°C to 60°C
Min. Bend Radius (Fixed)	27mm

#### ELECTRICAL PROPERTIES

Nom. Conductor DC Resistance @20°C	175Ω/km
Voltage test : Core to Core	1kV a.c/1min
Voltage test : Core to Shielding	1kV a.c/1min